




TEMPERATURE - VIBRATION TEST CHAMBER

STANDARD FEATURES

1. Heliarc welded 304 series stainless steel liner.
2. Fiber glass insulation.
3. Vapor tight door gaskets.
4. Full opening door.
5. Refrigeration self-contained.
6. All parts exposed to conditioned air, are stainless or aluminum.
7. Exterior mounted motors; no bearings in test area.
8. Blower provides uniform air flow.
9. Control circuit provides fast response to demands, assuring better control at set point.
10. Temperature measured in discharge air.
11. All electrical connections on numbered terminal strips.
12. Electrical wiring and components conform to N.E.C.
13. High heat safety switch.
14. Safety interlock on heaters and fans.
15. Dimensions are clear working area.
16. Removable silicone impregnated diaphragm.
17. Inconel sheathed heaters.
18. Copper fins, copper tube coils.
19. All chambers are performance tested at factory.
20. Conrad warranty.

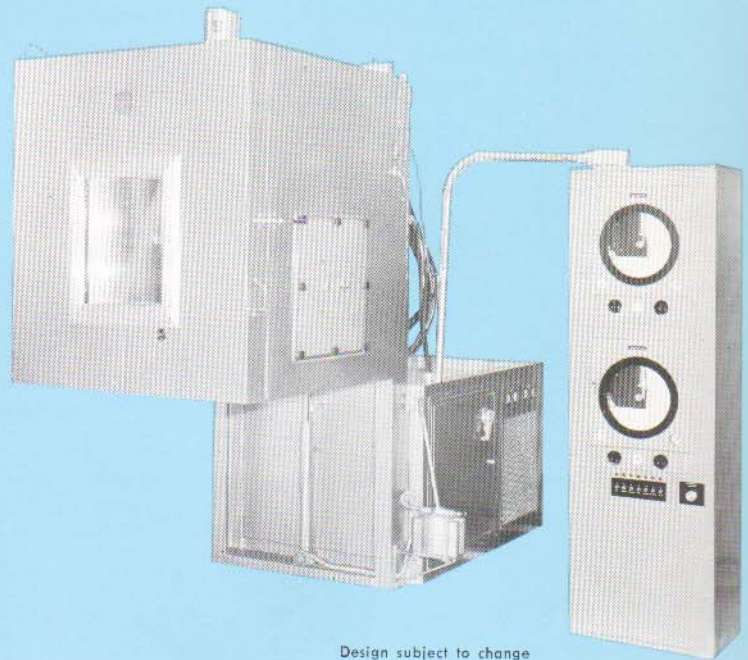

Design subject to change without notice.

Illustrated: FBV-35 Chamber
OTHER SIZES AVAILABLE

MODEL	W	D	H	CATALOG NO.
	(Inside Dimensions)			
FBV-4	20"	20"	18"	480
FBV-11	26"	25"	30"	481
FBV-35	38"	38"	43"	482
FBV-72	49"	52"	49"	483

CONRAD, INC.

CONRAD SQUARE
HOLLAND, MICHIGAN 49423
PHONE 616-392-3161

Subsidiary GULF & WESTERN